




- NOTES:**
1. CONTRACTOR SHALL FURNISH AND INSTALL A STABILIZED CONSTRUCTION ENTRANCE AT THE END OF THE PAVED SURFACE OF SHEPPARD DRIVE. STABILIZED CONSTRUCTION ENTRANCE SHALL CONSIST OF 3"-5" OPEN GRADED ROCK AS DETAILED ON SHEET D-06 OF THE PLANS. THE GENERAL LOCATION OF THE ENTRANCE IS SHOWN ON SHEET G-01 OF THE PLANS.
 2. SEE SHEET D-06 FOR DETAILS OF ROCK BERM AND SILT FENCE.
 3. CONTRACTOR SHALL PREPARE STORMWATER POLLUTION PREVENTION PLAN AND SUBMIT TO TCEQ TO OBTAIN A PERMIT. THE COST FOR SUBMISSION TO TCEQ, RECEIVING A PERMIT AND IMPLEMENTING, INCLUDING FURNISHING AND INSTALLING, MAINTAINING AND REMOVING EROSION CONTROL MEASURES SHALL BE INCLUDED IN THE LUMP SUM BID ITEM FOR CONSTRUCTION OF THE 0.200 MGD WWTP. NO SEPARATE PAYMENTS WILL BE MADE FOR INSTALLING, IMPLEMENTING AND REMOVING EROSION CONTROL MEASURES.

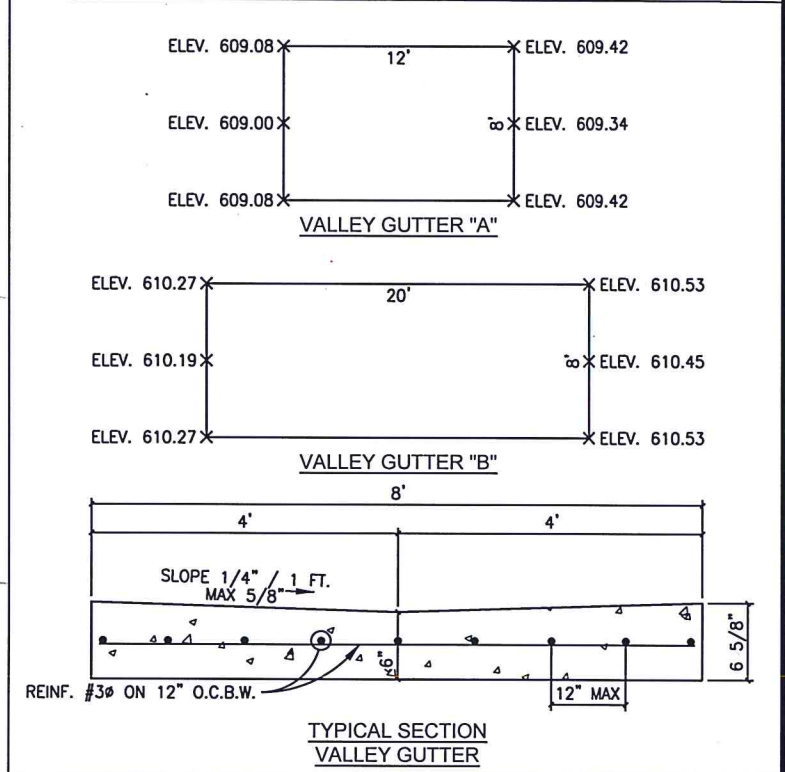

(Add No. 1, Item II. 6)

1	10/2/17	Final Bid Set	RNK
2	10/23/17	Added Erosion Control	RNK
NO.	DATE	REVISION	BY
Plot Date: Oct 23, 2017 - 1:28pm Plotted By: DLK			

PROJECT NO. 2015 - 143
 DRAWN BY Douglas L. Krumnow
 DESIGNED BY Rick N. Kasberg, P.E.
 APPROVED BY *[Signature]*
 DATE 10-31-17



KPA
KASBERG, PATRICK & ASSOCIATES, LP
 CONSULTING ENGINEERS
 TEMPLE, TEXAS 76501

VILLAGE OF SALADO, TEXAS
 0.200 MGD WASTEWATER TREATMENT PLANT
 GRADING AND EROSION CONTROL PLAN

SHEET NO. **G-10**
 OF **11**

P:\Salado, Village of\2015\2015-143\CAD\GENERAL\G-10_GRADING PLAN.dwg